


# HK TS

## TS temperature switch

### Properties

|                                   |                                    |
|-----------------------------------|------------------------------------|
| <b>Design</b>                     | 1 temperature contact<br>with seal |
| <b>Operating pressure</b>         | max. 1 bar                         |
| <b>Operating temperature max.</b> | 80 °C                              |
| <b>Current consumption</b>        | max. 1 A at 250 VAC                |
| <b>Hysteresis</b>                 | 10 K ± 5 K                         |
| <b>Scope of supply</b>            | incl. connector                    |

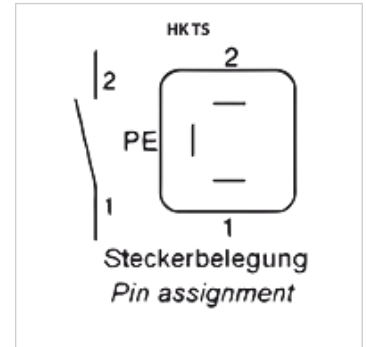

### Item

| Identification | Switching temperature (°C) | Switching function | Weight (kg) |
|----------------|----------------------------|--------------------|-------------|
| HK TS 50 NC-12 | 50                         | NC contact         | 0,31        |
| HK TS 60 NC-12 | 60                         | NC contact         | 0,31        |
| HK TS 70 NC-12 | 70                         | NC contact         | 0,31        |
| HK TS 80 NC-12 | 80                         | NC contact         | 0,31        |
| HK TS 50 NO-12 | 50                         | NO contact         | 0,31        |
| HK TS 60 NO-12 | 60                         | NO contact         | 0,31        |
| HK TS 70 NO-12 | 70                         | NO contact         | 0,31        |
| HK TS 80 NO-12 | 80                         | NO contact         | 0,31        |