


# HK V0 590

Shock valve

**HANSA FLEX**

## Properties

<b>Design</b>	Direct flange mounting O-ring gasket
<b>Material</b>	Housing: Galvanised steel Inside parts of steel
<b>Operating pressure</b>	max. 300 bar
<b>Use</b>	For hydraulic planetary motors

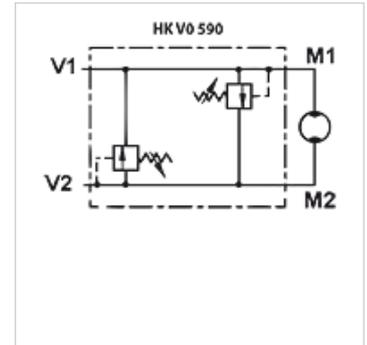

## Note

These valves must be set according to the application.

## Ordering information

Springs for other setting ranges available as accessories

## Item

Identification	Flow rate max. (L/min)	for motor	Connection	Setting range min. (bar)	Setting range max. (bar)	Weight (kg)
HK V0 590 0500	60	HK EPM, HK EPRM, HK HM BMP HD, HK HM BMR HD	G 1/2" - female thread	40	180	0,80
HK V0 590 0490	60	HK EPMS, HK HM BMS	G 1/2" - female thread	40	180	1,50
HK V0 590 0505	100	HK EPMT, HK HM BMT	G 3/4" - female thread	40	180	1,85

## Accessories

HK VML	Spring for shock valve
HK M HK V0590	Screw kit for shock valve HK V0590