


HK V1 501

V1501 non-return valve

Properties

| | |
|---------------------------|--|
| Design | Cone locking |
| Material | Housing: Galvanised steel Inside parts of steel |
| Operating pressure | max. 350 bar |

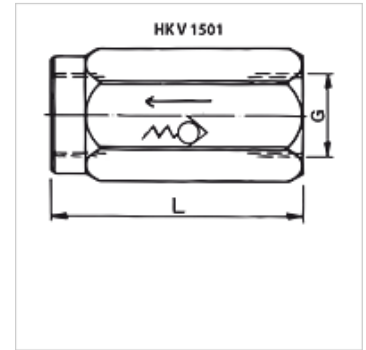

Item

| Identification | p max. (bar) | Opening pressure (bar) | Q max. (L/min) | G | L (mm) | AF (mm) | Weight (kg) |
|----------------|-----------------|---------------------------|-------------------|----------|-----------|------------|----------------|
| HK V1 501 0004 | 350 | 0,5 | 20 | G 1/4" | 62 | 19 | 0,12 |
| HK V1 501 0006 | 350 | 0,5 | 40 | G 3/8" | 68 | 24 | 0,15 |
| HK V1 501 0008 | 350 | 0,5 | 60 | G 1/2" | 77 | 30 | 0,28 |
| HK V1 501 0012 | 300 | 0,5 | 100 | G 3/4" | 88 | 36 | 0,28 |
| HK V1 501 0016 | 300 | 0,5 | 150 | G 1" | 105 | 41 | 0,35 |
| HK V1 501 0020 | 250 | 0,5 | 200 | G 1.1/4" | 127 | 55 | 0,40 |

AF = Width across flats