HK V1 710


V1710 non-return valve

HANSA-FLEX

Properties

Design	Cone locking pilot-controlled - single-acting
Material	Housing: Galvanised steel Inside parts of hardened steel
Operating pressure	max. 320 bar



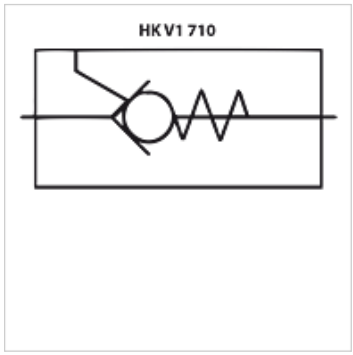

Note

Please note: max. thread depth S1 =10.1 mm!

Item

Identification	Opening pressure (bar)	Level control ratio	Q max. (L/min)	A (mm)	B (mm)	C	D	AF (mm)	Weight (kg)
HK V1 710 0004	2,5	1:9	15	103	31	1/4"	1/4"	36	0,60
HK V1 710 0006	5,0	1:6	35	112	35	1/4"	3/8"	40	0,82
HK V1 710 0008	3,0	1:4	45	120	38	1/4"	1/2"	42	1,10
HK V1 710 0012	0,5	1:4	80	151	45	1/4"	3/4"	55	1,90

AF = Width across flats

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.