


# HK V1 865

## V1865 non-return valve

### Properties

<b>Design</b>	Cone locking pilot-controlled - double-acting
<b>Material</b>	Housing: Galvanised steel Inside parts of hardened steel
<b>Operating pressure</b>	max. 350 bar

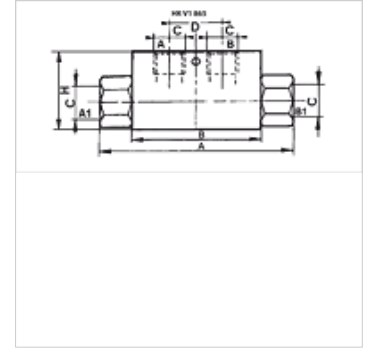

### Item

Identification	p max. (bar)	Opening pressure (bar)	Level control ratio	Q max. (L/min)	A (mm)	B (mm)	C	D (mm)	H (mm)	Weight (kg)
HK V1 865 0400	350	4,0	1:5.5	20	118	68	1/4" BSPP	38	40	0,66
HK V1 865 06NT	350	4,0	1:5.5	30	118	68	3/8" BSPP	38	40	0,66
HK V1 865 0800	300	4,0	1:5	45	144	80	1/2" BSPP	40	50	1,76
HK V1 865 M18X15	350	4,0	1:5.5	20	118	68	M 18 x 1.5	38	40	0,54