
HK V2 190

V2190 lowering valve

Properties

Design	single-acting
Material	Housing: Galvanised steel Inside parts of steel
Operating pressure	max. 350 bar



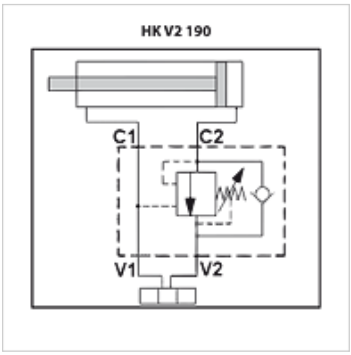

Note

When using these valve with a plunger cylinder, an additional pressure relief valve must be installed in the V1 line that has to be matched to the load pressure of the cylinder. This pressure relief valve must discharge to the tank.
These rate-of-drop valves must be set according to the application.

Item

Identification	Thread	Q max. (L/min)	Level control ratio	H (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	S (mm)	Weight (kg)
HK V2 190 A600	G 3/8”	40	1:4	60	100	148	30	60	30	1,21
HK V2 190 A800	G 1/2”	60	1:4	60	100	148	35	65	30	1,15

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.