
HK V2 290

V2290 lowering valve

Properties

Design	double-acting
Material	Housing: Galvanised steel Inside parts of steel
Operating pressure	max. 350 bar



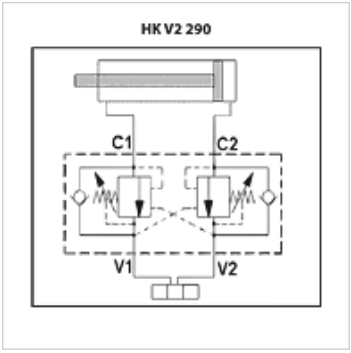

Note

These rate-of-drop valves must be set according to the application.

Item

Identification	Thread	Q max. (L/min)	Level control ratio	H (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	S (mm)	Weight (kg)
HK V2 290 A600	G 3/8”	40	1:4	60	150	246	50	110	30	1,74
HK V2 290 A800	G 1/2”	60	1:4	60	150	246	50	110	30	1,70

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.