


# HK V2 765 Z

Flow-control non-return valve V765Z

**HANSA FLEX**

## Properties

<b>Design</b>	Ball locking
<b>Material</b>	Housing: Cast iron Inside parts of steel
<b>Media</b>	Mineral oil
<b>Operating pressure</b>	max. 300 bar

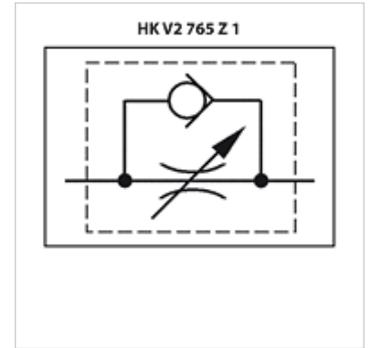

## Note

These valves must be set according to the application.

## Item

Identification	p max. (bar)	Q max. (L/min)	L (mm)	D (mm)	G	Weight (kg)
HK V2 765 Z400	300	20	66	34	G 1/4"	0,27
HK V2 765 Z600	300	45	77	36	G 3/8"	0,33
HK V2 765 Z800	300	70	80	42	G 1/2"	0,49
HK V2 765 Z1000	250	110	95	51	G 3/4"	0,83