


# HK V2 765 Z

Flow-control non-return valve V765Z

**HANSA FLEX**

## Properties

|                           |   |
|---------------------------|---|
| <b>Design</b>             | Ball locking                                |
| <b>Material</b>           | Housing: Cast iron<br>Inside parts of steel |
| <b>Media</b>              | Mineral oil                                 |
| <b>Operating pressure</b> | max. 300 bar                                |

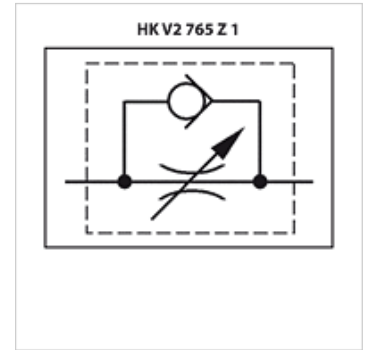

## Note

These valves must be set according to the application.

## Item

| Identification  | p max.<br>(bar) | Q max.<br>(L/min) | L<br>(mm) | D<br>(mm) | G      | Weight<br>(kg) |
|-----------------|-----------------|-------------------|-----------|-----------|--------|----------------|
| HK V2 765 Z400  | 300             | 20                | 66        | 34        | G 1/4" | 0,27           |
| HK V2 765 Z600  | 300             | 45                | 77        | 36        | G 3/8" | 0,33           |
| HK V2 765 Z800  | 300             | 70                | 80        | 42        | G 1/2" | 0,49           |
| HK V2 765 Z1000 | 250             | 110               | 95        | 51        | G 3/4" | 0,83           |