
# HK V7 667

6/3-way changeover valve

## Properties

| | |
|---|---|
| **Design** | Type A - mid-position open<br>Type C - mid-position closed |
| **Material** | Housing: cast iron, inner parts steel |



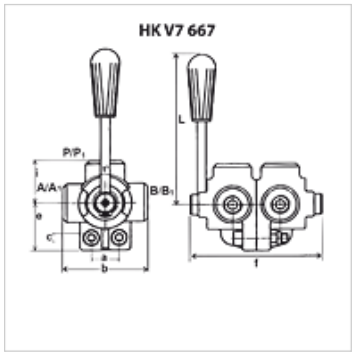


## Note

Rotary slide valves can be pressurised from all sides and are designed to have less internal leakage

## Item

| Identification | Pressure max. (bar) | Connections | Q max. (L/min) | a (mm) | b (mm) | c (mm) | e (mm) | f (mm) | i (mm) | L (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **HK V7 667 A06** | 250 | 3/8" | 40 | 24 | 73 | 8,5 | 42 | 124 | 36 | 110 | 1,7 |
| **HK V7 667 A08** | 250 | 1/2" | 60 | 30 | 85 | 11,0 | 53 | 140 | 43 | 120 | 2,9 |
| **HK V7 667 A12** | 220 | 3/4" | 120 | 32 | 91 | 11,0 | 54 | 160 | 47 | 125 | 3,7 |
| **HK V7 667 A16** | 220 | 1" | 180 | 32 | 98 | 11,0 | 64 | 180 | 51 | 130 | 5,2 |
| **HK V7 667 C06** | 250 | 3/8" | 40 | 24 | 73 | 8,5 | 42 | 124 | 36 | 110 | 1,7 |
| **HK V7 667 C08** | 250 | 1/2" | 60 | 30 | 85 | 11,0 | 53 | 140 | 43 | 120 | 2,9 |
| **HK V7 667 C12** | 220 | 3/4" | 120 | 32 | 91 | 11,0 | 54 | 160 | 47 | 125 | 3,7 |
| **HK V7 667 C16** | 220 | 1" | 180 | 32 | 98 | 11,0 | 64 | 180 | 51 | 130 | 5,2 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*