HK V7 667

6/3-way changeover valve

Properties

Design	Type A - mid-position open Type C - mid-position closed
Material	Housing: cast iron, inner parts steel



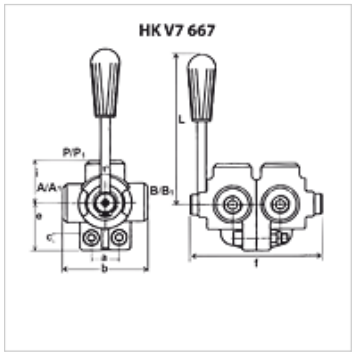

Note

Rotary slide valves can be pressurised from all sides and are designed to have less internal leakage

Item

Identification	Pressure max. (bar)	Connections	Q max. (L/min)	a (mm)	b (mm)	c (mm)	e (mm)	f (mm)	i (mm)	L (mm)	Weight (kg)
HK V7 667 A06	250	3/8"	40	24	73	8,5	42	124	36	110	1,7
HK V7 667 A08	250	1/2"	60	30	85	11,0	53	140	43	120	2,9
HK V7 667 A12	220	3/4"	120	32	91	11,0	54	160	47	125	3,7
HK V7 667 A16	220	1"	180	32	98	11,0	64	180	51	130	5,2
HK V7 667 C06	250	3/8"	40	24	73	8,5	42	124	36	110	1,7
HK V7 667 C08	250	1/2"	60	30	85	11,0	53	140	43	120	2,9
HK V7 667 C12	220	3/4"	120	32	91	11,0	54	160	47	125	3,7
HK V7 667 C16	220	1"	180	32	98	11,0	64	180	51	130	5,2

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.