


# HK VRDE

VRDE non-return valve for cylinder installation

**HANSA FLEX**

## Properties

<b>Design</b>	Cone locking pilot-controlled - double-acting Direct flange mounting on cylinder
<b>Scope of supply</b>	incl. hollow screw and gaskets
<b>Material</b>	Steel housing
<b>Operating pressure</b>	max. 300 bar

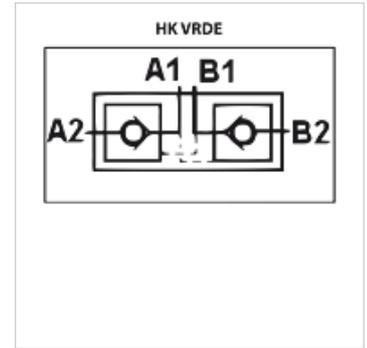

## Note

Recommended minimum distance of cylinder oil connections: 144 mm for HK VRDE 10 CIL / 150 mm for HK VRDE 20 CIL

## Item

Identification	Opening pressure (bar)	Level control ratio	Q max. (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Connection A1, A2, B1	Hollow screw B2	Weight (kg)
HK VRDE 10 CIL	0,6	1:4.5	20	88,5	84	68,5	24	40	27	10	G 1/4" - IG	1/4" AG	0,62
HK VRDE 20 CIL	0,6	1:4.9	20	90,5	86	72,0	26	45	31	12	G 3/8" - IG	3/8" AG	0,62