
HK VRDE

VRDE non-return valve for cylinder installation

Properties

Design	Cone locking pilot-controlled - double-acting Direct flange mounting on cylinder
Scope of supply	incl. hollow screw and gaskets
Material	Steel housing
Operating pressure	max. 300 bar



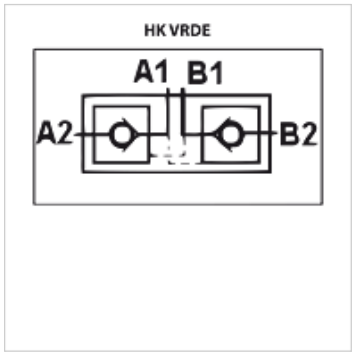

Note

Recommended minimum distance of cylinder oil connections: 144 mm for HK VRDE 10 CIL / 150 mm for HK VRDE 20 CIL

Item

Identification	Opening pressure (bar)	Level control ratio	Q max. (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Connection A1, A2, B1	Hollow screw B2	Weight (kg)
HK VRDE 10 CIL	0,6	1:4.5	20	88,5	84	68,5	24	40	27	10	G 1/4” - IG	1/4" AG	0,62
HK VRDE 20 CIL	0,6	1:4.9	20	90,5	86	72,0	26	45	31	12	G 3/8” - IG	3/8" AG	0,62

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.