


HK ZNS 02

Overcentre valve

HANSA FLEX

Properties

| | |
|---------------------------|----------------------|
| Design | Sandwich body valve |
| Operating pressure | max. 315 bar |
| Volumetric flow | max. 120 l/min |
| Connection | ISO/Cetop 05 size 10 |

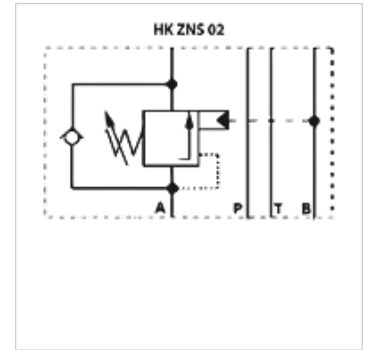

Note

These valves must be set according to the application.

Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 05 size 10 valves

Ordering information

Further sandwich body valves available on request

| Item | | | | | | |
|---------------------|-----------------|--------------------------------------|--------------------------------------|-----------------------|----------------------|----------------|
| Identification | acts in channel | Pressure setting range min. (bar) | Pressure setting range max. (bar) | Design | Plate height (mm) | Weight (kg) |
| HK ZNS A02 2 S0 D1 | A | 70 | 175 | Opening ratio 1 : 4.5 | 50 | 2,8 |
| HK ZNS A02 5 S0 D1 | A | 140 | 315 | Opening ratio 1 : 4.5 | 50 | 2,8 |
| HK ZNS B02 2 S0 D1 | B | 70 | 175 | Opening ratio 1 : 4.5 | 50 | 2,8 |
| HK ZNS B02 5 S0 D1 | B | 140 | 315 | Opening ratio 1 : 4.5 | 50 | 2,8 |
| HK ZNS AB02 2 S0 D1 | A + B | 70 | 175 | Opening ratio 1 : 4.5 | 50 | 2,8 |
| HK ZNS AB02 5 S0 D1 | A + B | 140 | 315 | Opening ratio 1 : 4.5 | 50 | 2,8 |