
KOMP G
Compressor hose

HANSA-FLEX

Properties

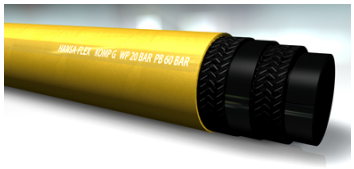

Application	Mining Compressors
Special features	smooth outer cover
Inner layer	Natural and synthetic rubber
Insert	highly tear-resistant synthetic textile insert
Outer layer	Natural and synthetic rubber, abrasion, ozone and weather resistant
Colour	yellow
Temp. min.	-25 °C
Temp. max.	70 °C
Media	Compressed air

Item

Identification	Inches	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	Operating pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)	Roll length (m)
KOMP 13-5 G	1/2"	13,0	23	5,0	20,0	60	125	40
KOMP 19-5 G	3/4"	19,0	29	5,0	20,0	60	190	40
KOMP 19-6 G	3/4"	19,0	31	6,0	20,0	60	190	40
KOMP 25-5.5 G	1"	25,4	36	5,5	20,0	60	254	40
KOMP 25-7 G	1"	25,4	39	7,0	20,0	60	254	40
KOMP 32-6 G	1.1/4"	32,0	44	6,0	20,0	60	260	40
KOMP 38-5 G	1.1/2"	38,0	48	5,0	20,0	60	380	40
KOMP 38-7 G	1.1/2"	38,0	52	7,0	20,0	60	380	40
KOMP 51-7.5 G	2"	50,8	66	7,5	20,0	60	510	40
KOMP 63-10 G	2.1/2"	63,5	84	10,0	20,0	60	480	40
KOMP 75-9 G	3"	76,2	92	9,0	20,0	60	762	40

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.