
TF 100
PTFE hose, smooth, 1 braiding

HANSA-FLEX

Properties

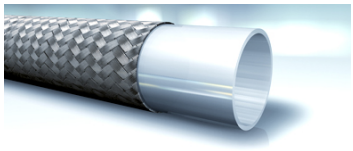

Application	Medium pressure applications with hydraulic fluids (high temperatures) and aggressive media for the chemical industry Surface technology 2-component systems
Design	Smooth inliner in white PTFE
Braiding	1 braiding with 1.4301 / 1.4306
Inner layer	PTFE
Outer layer	none
Colour	metallic
Temp. min.	-70 °C
Temp. max.	260 °C
Material	PTFE (polytetrafluoroethylene)

Note

Not recommended for high dynamic pressure loads.
From 120 °C the pressure reduction factor is to be taken into account.
(Max. operating pressure = operating pressure x factor).
Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C
Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

Item

Identification	DN*	Inches	Size	Internal Ø min. (mm)	Internal Ø max. (mm)	External Ø min. (mm)	External Ø max. (mm)	Operating pressure (bar)	Test pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)
TF 104	5	3/16"	3	5,0	5,4	7,5	8,6	264,0	396	793	64
TF 106	6	1/4"	4	6,5	7,0	8,8	9,9	224,0	336	672	76
TF 108	8	5/16"	5	8,2	8,7	10,5	11,6	207,0	311	621	102
TF 110	10	3/8"	6	9,9	10,6	12,8	14,1	183,0	275	552	133
TF 113	12	1/2"	8	13,1	13,4	15,9	17,2	161,0	242	483	152
TF 116	16	5/8"	10	16,0	17,1	19,0	20,6	114,0	171	345	178
TF 120	19	3/4"	12	19,3	20,3	22,2	23,8	103,0	155	310	203
TF 125	25	1"	16	25,8	26,6	28,5	30,1	80,0	120	241	305

DN = Nominal diameter, nominal width

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.