


# FI (Flansche)

## Pump connection (4 hole)

### Properties

<b>Design</b>	Pump connection (4 hole)
<b>Construction</b>	straight
<b>Mounting</b>	with metric screw set
<b>Scope of supply</b>	with screw set and O-ring
<b>Material</b>	Steel ST 42.3
<b>Surface</b>	electro galvanised

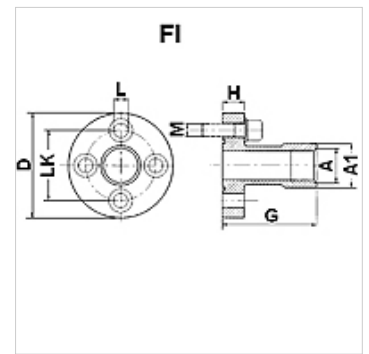

### Note

The stated maximum working pressure relates to the flange. The actual working pressure is determined by the pipe (wall thickness) and the quality of the pipe.

Item										
Identification	Pressure PB (bar)	LK (mm)	A	A1 (mm)	D (mm)	G (mm)	H (mm)	L (mm)	Screws	OR
FI 1	250	30	G 3/8" -19	21,0	45	55	10	6,5	(4 x) M 6 x 20	18.77 x 1.78
FI 2	250	40	G 1/2" -14	26,5	58	60	12	8,5	(4 x) M 8 x 25	25.12 x 1.78
FI 3 A	250	51	G 3/4" -14	33,5	76	72	16	10,5	(4 x) M 10 x 30	31.42 x 2.62
FI 3 B	250	56	G 3/4" -14	33,5	76	72	16	10,5	(4 x) M 10 x 30	31.42 x 2.62

PN = Nominal pressure PB = Max. operating pressure