


# FI (Flansche)

## Pump connection (4 hole)

### Properties

<b>Design</b>	Pump connection (4 hole)
<b>Construction</b>	straight
<b>Mounting</b>	with metric screw set
<b>Scope of supply</b>	with screw set and O-ring
<b>Material</b>	Steel ST 42.3
<b>Surface</b>	electro galvanised

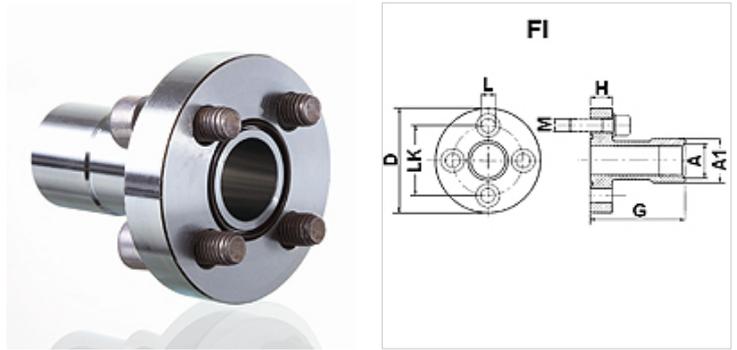

### Note

The stated maximum working pressure relates to the flange. The actual working pressure is determined by the pipe (wall thickness) and the quality of the pipe.

### Item

Identification	Pressure PB (bar)	LK (mm)	A	A1 (mm)	D (mm)	G (mm)	H (mm)	L (mm)	Screws	OR
<b>FI 1</b>	250	30	G 3/8" -19	21,0	45	55	10	6,5	(4 x) M 6 x 20	18.77 x 1.78
<b>FI 2</b>	250	40	G 1/2" -14	26,5	58	60	12	8,5	(4 x) M 8 x 25	25.12 x 1.78
<b>FI 3 A</b>	250	51	G 3/4" -14	33,5	76	72	16	10,5	(4 x) M 10 x 30	31.42 x 2.62
<b>FI 3 B</b>	250	56	G 3/4" -14	33,5	76	72	16	10,5	(4 x) M 10 x 30	31.42 x 2.62

PN = Nominal pressure PB = Max. operating pressure