

# KF-DI

O-ring, Aluminium/FKM (FPM)

## Properties


**Application** Sealing components for small flange connections

**Design** Aluminium centering ring with FKM (FPM) O-ring

**Standard** DIN 28403  
ISO 2861

**Material** Aluminium eccentric ring  
O-Ring: FKM (FPM)

**Temp. range** Aluminium from -156 °C to 150 °C  
FKM (FPM) von -20 °C bis 200 °C

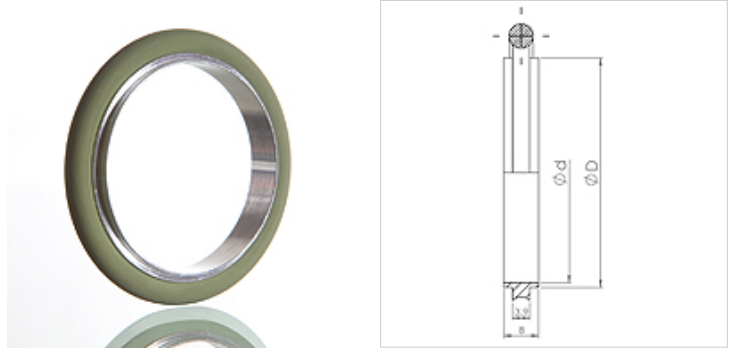

## Note

Pressure range from 10–7 mbar to 2.5 bar

## Ordering information

Other designs available on request

## Item

| Identification | DN | D<br>(mm) | d<br>(mm) |
|----------------|----|-----------|-----------|
| KF-DI 010      | 10 | 12,0      | 10,0      |
| KF-DI 016      | 16 | 17,0      | 16,0      |
| KF-DI 020      | 20 | 22,0      | 20,0      |
| KF-DI 025      | 25 | 26,0      | 25,0      |
| KF-DI 032      | 32 | 34,0      | 32,0      |
| KF-DI 040      | 40 | 41,0      | 40,0      |
| KF-DI 050      | 50 | 52,0      | 50,0      |