

KF-DI

O-ring, Aluminium/FKM (FPM)

Properties



Application Sealing components for small flange connections

Design Aluminium centering ring with FKM (FPM) O-ring

Standard DIN 28403
ISO 2861

Material Aluminium eccentric ring
O-Ring: FKM (FPM)

Temp. range Aluminium from -156 °C to 150 °C
FKM (FPM) von -20 °C bis 200 °C

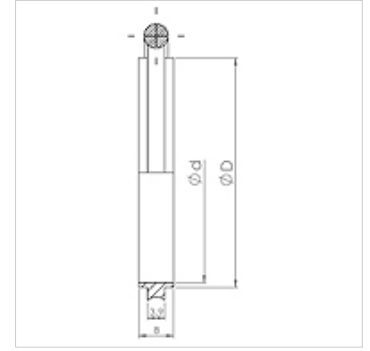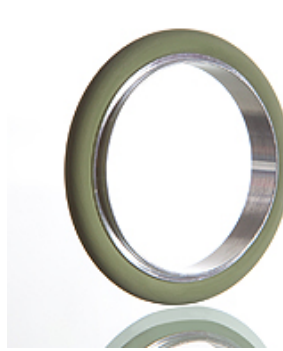

Note

Pressure range from 10–7 mbar to 2.5 bar

Ordering information

Other designs available on request

Item

| Identification | DN | D (mm) | d (mm) |
|----------------|----|-----------|-----------|
| KF-DI 010 | 10 | 12,0 | 10,0 |
| KF-DI 016 | 16 | 17,0 | 16,0 |
| KF-DI 020 | 20 | 22,0 | 20,0 |
| KF-DI 025 | 25 | 26,0 | 25,0 |
| KF-DI 032 | 32 | 34,0 | 32,0 |
| KF-DI 040 | 40 | 41,0 | 40,0 |
| KF-DI 050 | 50 | 52,0 | 50,0 |