


Properties

| | |
|--------------------|--|
| Application | as external protection for hose lines and / or for reinforcing the bending radius. |
| Design | hooked profile in crimped stainless steel |
| Temp. min. | -200 °C |
| Temp. max. | 550 °C |
| Material | Stainless steel 1.4301 |

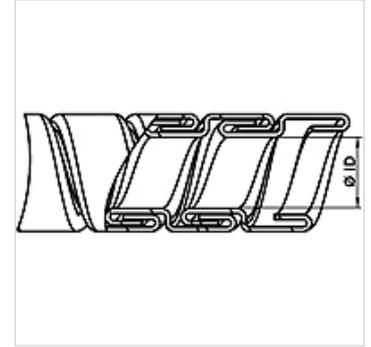

Ordering information

Other sizes on request

| Item | | | | | | |
|----------------|-----------|-----------|--------------------------|-------------------|--------------------------|--|
| Identification | Ø ID (mm) | Ø AD (mm) | Tolerances of ID/ED (mm) | Weight per m (kg) | Min. bending radius (mm) | |
| SSA 012 | 12,00 | 15,00 | 0,20 | 0,213 | 65 | |
| SSA 015 | 15,00 | 18,00 | 0,20 | 0,265 | 80 | |
| SSA 018 | 18,00 | 21,00 | 0,20 | 0,319 | 90 | |
| SSA 019 | 19,00 | 23,00 | 0,30 | 0,380 | 95 | |
| SSA 020 | 20,00 | 24,00 | 0,30 | 0,400 | 100 | |
| SSA 021 | 21,00 | 25,00 | 0,30 | 0,420 | 105 | |
| SSA 023 | 23,00 | 27,00 | 0,30 | 0,460 | 115 | |
| SSA 025 | 25,00 | 29,00 | 0,30 | 0,500 | 125 | |
| SSA 026 | 26,00 | 30,00 | 0,30 | 0,520 | 130 | |
| SSA 027 | 27,00 | 31,00 | 0,30 | 0,540 | 135 | |
| SSA 028 | 28,00 | 32,00 | 0,30 | 0,560 | 140 | |
| SSA 029 | 29,00 | 33,00 | 0,30 | 0,580 | 145 | |
| SSA 030 | 30,00 | 34,00 | 0,40 | 0,600 | 150 | |
| SSA 032 | 32,00 | 36,00 | 0,40 | 0,640 | 160 | |
| SSA 035 | 35,00 | 39,00 | 0,40 | 0,680 | 165 | |
| SSA 038 | 38,00 | 42,00 | 0,40 | 0,760 | 175 | |
| SSA 042 | 42,00 | 46,00 | 0,40 | 0,807 | 185 | |
| SSA 048 | 48,00 | 52,00 | 0,40 | 0,922 | 200 | |
| SSA 052 | 52,00 | 56,00 | 0,50 | 0,999 | 215 | |
| SSA 070 | 70,00 | 76,00 | 0,60 | 2,180 | 240 | |
| SSA 090 | 90,00 | 98,00 | 0,80 | 2,800 | 300 | |