


SSR VA

Abrasion protection, round, VA

Properties

Application	Hose lines that are subjected to a shearing load during movement.
Application	as external protection for hose lines and / or for reinforcing the bending radius.
Material	Stainless steel

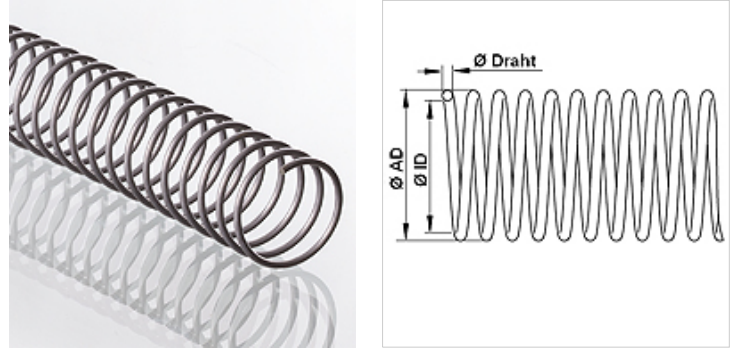

Description

Round spring steel wire protective helix protects the hose against extreme external abrasion.

Ordering information

Other sizes on request

Item

Identification	Ø ID (mm)	Ø AD (mm)	Wire Ø (mm)
SSR 06-0.5 VA	6,00	7,00	0,5
SSR 11-1 VA	11,00	13,00	1,0
SSR 14-2 VA	14,00	18,00	2,0
SSR 15-2 VA	15,00	19,00	2,0
SSR 20-2 VA	20,00	24,00	2,0
SSR 23-2 VA	23,00	27,00	2,0
SSR 23.5-2.5 VA	23,50	28,50	2,5
SSR 26-2 VA	26,00	30,00	2,0
SSR 27-2 VA	27,00	31,00	2,0
SSR 35-2 VA	35,00	39,00	2,0
SSR 37-2 VA	37,00	41,00	2,0
SSR 40-2 VA	40,00	44,00	2,0
SSR 41-3 VA	41,00	47,00	3,0
SSR 45-3 VA	45,00	51,00	3,0
SSR 48-3 VA	48,00	54,00	3,0
SSR 54-2.5 VA	54,00	59,00	2,5
SSR 55-3 VA	55,00	61,00	3,0
SSR 61-4 VA	61,00	69,00	4,0
SSR 70-4.5 VA	70,00	79,00	4,5
SSR 85-3 VA	85,00	91,00	3,0
SSR 91-6 VA	91,00	103,00	6,0
SSR 93-4 VA	93,00	101,00	4,0
SSR 105-5 VA	105,00	115,00	5,0
SSR 130-4 VA	130,00	138,00	4,0
SSR 135-4 VA	135,00	143,00	4,0

Product versions

SSR Abrasion protection, round, Steel