LM-DI PT


PTFE gasket for use with foodstuffs

HANSA-FLEX

Properties

Application	Sealing ring for thread sockets for use with foodstuffs
Design	flattened sealing ring on one side
Standard	DIN 11851
Material	PTFE
Temp. range	from -200 °C to 260 °C



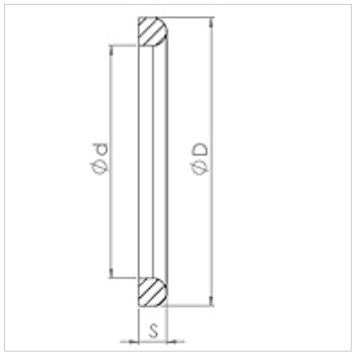

Ordering information

Other designs available on request

Item

Identification	DN	D (mm)	d (mm)	S (mm)
LM-DI 010 PT	10	20,0	12,0	4,5
LM-DI 013 PT	13	26,0	18,0	4,5
LM-DI 020 PT	20	33,0	23,0	4,5
LM-DI 025 PT	25	40,0	30,0	5,0
LM-DI 032 PT	32	46,0	36,0	5,0
LM-DI 040 PT	40	52,0	42,0	5,0
LM-DI 050 PT	50	64,0	54,0	5,0
LM-DI 065 PT	65	81,0	71,0	5,0
LM-DI 080 PT	80	95,0	85,0	5,0
LM-DI 100 PT	100	114,0	104,0	6,0

Spare part for following products

TUEG LMH VA	Dairy coupling male thread, with smooth tail, stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.