


## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	flat sealing
<b>Standard</b>	ISO 228-1
<b>Short code</b>	AGR-Flat
<b>Construction</b>	straight
<b>Material</b>	Stainless steel

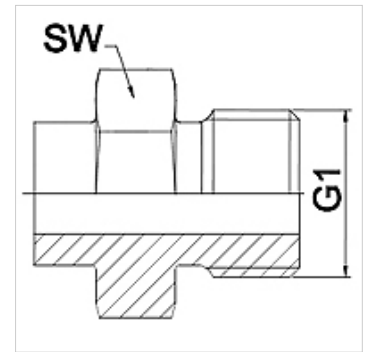

## Note

Width across flats values are listed for reference purposes!

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	G1	AF (mm)
WA 006 HR VA	6	350	G 1/4"	19
WA 010 HR VA	10	350	G 3/8"	22
WA 013 HR VA	13	315	G 1/2"	27
WA 016 HR VA	16	315	G 5/8"	30
WA 020 HR VA	20	250	G 3/4"	32
WA 025 HR VA	25	200	G 1"	41
WA 032 HR VA	32	160	G 1.1/4"	50
WA 040 HR VA	40	125	G 1.1/2"	55
WA 050 HR VA	50	80	G 2"	70
WA 065 HR VA	65	40	G 2.1/2"	85
WA 080 HR VA	80	40	G 3"	95

## Product versions

WA HR Connector ... HR, steel, Steel