


# WA FA

Connector ... FA, steel

**HANSA FLEX**

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	Pipe socket, imperial with welded ends
<b>Sealing form 1</b>	Welded connection
<b>Standard</b>	DIN EN 10216-1
<b>Construction</b>	straight
<b>Material</b>	Steel P235TR2 (1.0255)

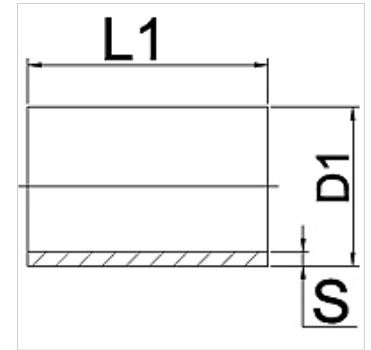

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	D1 (mm)	s (mm)	L1 (mm)
WA 013 FA	13	320	21,3	2,0	50
WA 020 FA	20	290	26,9	2,3	55
WA 025 FA	25	260	33,7	2,6	55
WA 032 FA	32	200	42,4	2,6	60
WA 040 FA	40	175	48,3	2,6	60
WA 050 FA	50	155	60,3	2,9	65
WA 065 FA	65	120	76,1	2,9	70
WA 080 FA	80	115	88,9	3,2	75
WA 100 FA	100	100	114,3	3,6	75
WA 125 FA	125	90	139,7	4,0	80
WA 150 FA	150	85	168,3	4,5	80

## Product versions

WA FA VA Connector ... FA, VA, Stainless steel 1.4571