


WA FA

Connector ... FA, steel

HANSA FLEX

Properties

Application	Connection fitting for metal hoses
Connection 1	Pipe socket, imperial with welded ends
Sealing form 1	Welded connection
Standard	DIN EN 10216-1
Construction	straight
Material	Steel P235TR2 (1.0255)

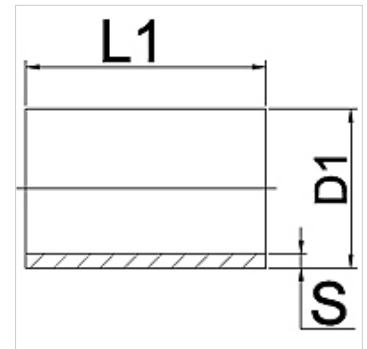

Ordering information

Other designs available on request

Item					
Identification	DN	PN (bar)	D1 (mm)	s (mm)	L1 (mm)
WA 013 FA	13	320	21,3	2,0	50
WA 020 FA	20	290	26,9	2,3	55
WA 025 FA	25	260	33,7	2,6	55
WA 032 FA	32	200	42,4	2,6	60
WA 040 FA	40	175	48,3	2,6	60
WA 050 FA	50	155	60,3	2,9	65
WA 065 FA	65	120	76,1	2,9	70
WA 080 FA	80	115	88,9	3,2	75
WA 100 FA	100	100	114,3	3,6	75
WA 125 FA	125	90	139,7	4,0	80
WA 150 FA	150	85	168,3	4,5	80

Product versions

WA FA VA Connector ... FA, VA, Stainless steel 1.4571