


Properties

Application	Connection fitting for metal hoses
Connection 1	Pipe sockets
Sealing form 1	Cutting ring connection
Standard	ISO 8434-1 DIN 3861
Short code	BES
Construction	straight
Series	heavy
Material	Stainless steel 1.4571

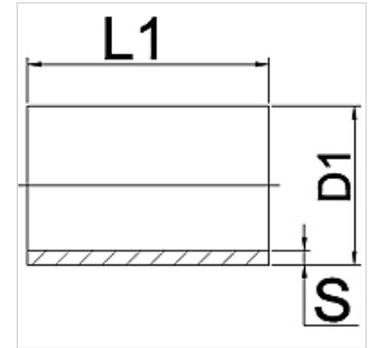

Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).
As an alternative we recommend connector shape AFS or AOS.

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	Series	D1 (mm)	s (mm)	L1 (mm)
WA 004 FS VA	4	300	8S	8	1,0	30
WA 006 FS VA	6	240	10 S	10	1,0	30
WA 008 FS VA	8	200	12 S	12	1,0	30
WA 010 FS VA	10	283	14 S	14	1,5	35
WA 013 FS VA	13	261	16 S	16	1,5	35
WA 016 FS VA	16	287	20 S	20	2,0	40
WA 020 FS VA	20	229	25 S	25	2,0	45
WA 025 FS VA	25	243	30 S	30	2,5	50
WA 032 FS VA	32	221	38 S	38	3,0	55

Product versions

WA FS	Connector ... FS, steel, Steel (weldable)
--------------	---