


## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	Pipe sockets
<b>Sealing form 1</b>	Cutting ring connection
<b>Standard</b>	ISO 8434-1 DIN 3861
<b>Short code</b>	BES
<b>Construction</b>	straight
<b>Series</b>	heavy
<b>Material</b>	Stainless steel 1.4571

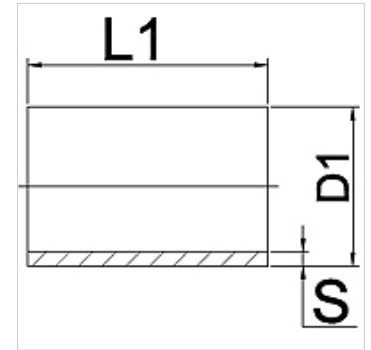

## Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).  
As an alternative we recommend connector shape AFS or AOS.

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	Series	D1 (mm)	s (mm)	L1 (mm)
WA 004 FS VA	4	300	8S	8	1,0	30
WA 006 FS VA	6	240	10 S	10	1,0	30
WA 008 FS VA	8	200	12 S	12	1,0	30
WA 010 FS VA	10	283	14 S	14	1,5	35
WA 013 FS VA	13	261	16 S	16	1,5	35
WA 016 FS VA	16	287	20 S	20	2,0	40
WA 020 FS VA	20	229	25 S	25	2,0	45
WA 025 FS VA	25	243	30 S	30	2,5	50
WA 032 FS VA	32	221	38 S	38	3,0	55

## Product versions

WA FS Connector ... FS, steel, Steel (weldable)