


WA FS

Connector ... FS, steel

HANSA FLEX

Properties

Application	Connection fitting for metal hoses
Connection 1	Pipe sockets
Sealing form 1	Cutting ring connection
Standard	ISO 8434-1 DIN 3861
Short code	BES
Construction	straight
Series	heavy
Material	Steel (weldable)

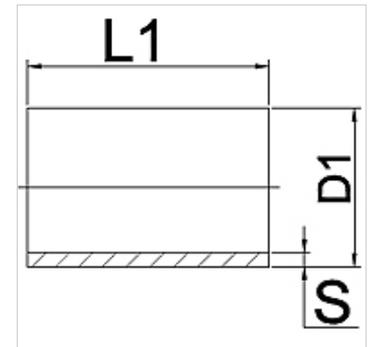

Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).
As an alternative we recommend connector shape AFS or AOS.

Ordering information

Other designs available on request

Item	Identification	DN	PN (bar)	Series	D1 (mm)	s (mm)	L1 (mm)
	WA 004 FS	4	320	8S	8	1,0	30
	WA 006 FS	6	263	10 S	10	1,0	30
	WA 008 FS	8	219	12 S	12	1,0	30
	WA 010 FS	10	299	14 S	14	1,5	35
	WA 013 FS	13	262	16 S	16	1,5	35
	WA 016 FS	16	288	20 S	20	2,0	40
	WA 020 FS	20	230	25 S	25	2,0	45
	WA 025 FS	25	244	30 S	30	2,5	50
	WA 032 FS	32	222	38 S	38	3,0	55

Product versions

WA FS VA Connector ... FS, VA, Stainless steel 1.4571