


# WA FS

Connector ... FS, steel

**HANSA FLEX**

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	Pipe sockets
<b>Sealing form 1</b>	Cutting ring connection
<b>Standard</b>	ISO 8434-1 DIN 3861
<b>Short code</b>	BES
<b>Construction</b>	straight
<b>Series</b>	heavy
<b>Material</b>	Steel (weldable)

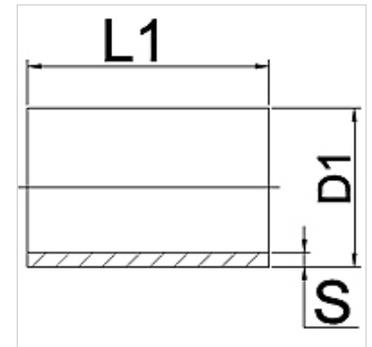

## Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).  
As an alternative we recommend connector shape AFS or AOS.

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	Series	D1 (mm)	s (mm)	L1 (mm)
WA 004 FS	4	320	8S	8	1,0	30
WA 006 FS	6	263	10 S	10	1,0	30
WA 008 FS	8	219	12 S	12	1,0	30
WA 010 FS	10	299	14 S	14	1,5	35
WA 013 FS	13	262	16 S	16	1,5	35
WA 016 FS	16	288	20 S	20	2,0	40
WA 020 FS	20	230	25 S	25	2,0	45
WA 025 FS	25	244	30 S	30	2,5	50
WA 032 FS	32	222	38 S	38	3,0	55

## Product versions

WA FS VA Connector ... FS, VA, Stainless steel 1.4571