


## Properties

<b>Design</b>	combinable with coupling HK ROTEX AF
<b>Material</b>	Aluminium
<b>Use</b>	For axial piston pump HK PVPC and vane pump HK PFE

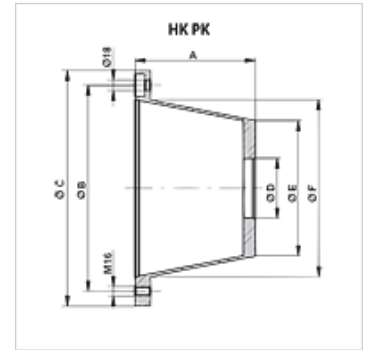

## Description

Centring for motor and pump shaft

## Item

Identification	A	Ø B	Ø C	Ø D	Ø E	Ø F	Flange for pump connection	Pump	Motor	Weight
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)				(kg)
HK PK 350 040 400	188,00	300	350	101,6	225	260	Two-hole flange 146	HKPFE41 / HKPVPC30	BG160	2,9
HK PK 350 060 400	204,00	300	350	101,6	230	260	Two-hole flange 146	HKPFE41 / HKPVPC30	BG160/180	3,0
HK PK 350 060 500	204,00	300	350	127,0	230	260	Two-hole flange 181	HKPVPC50	BG180	3,0
HK PK 350 101 900	228,00	300	350	127,0	248	260	Two-hole flange 181	HKPFE52	BG180	3,3
HK PK 400 040 400	204,00	350	400	101,6	230	300	Two-hole flange 146	HKPVPC40	BG200	5,3
HK PK 400 040 600	204,00	350	400	127,0	230	300	Two-hole flange 181	HKPVPC50	BG200	5,1
HK PK 400 050 700	228,00	350	400	127,0	279	300	Two-hole flange 181	HKPFE52	BG200	5,7
HK PK 450 032 300	262,00	400	450	127,0	315	350	Two-hole flange 181	HKPVPC50	BG225	6,6

## Accessories

HK DRV	Damping ring
HK DPT	Gasket for pump mounts