


# HK 054 322

Counterbalancing valve SC, single-acting

## Properties

<b>Design</b>	single-acting Pilot controlled Seat version - leak-free
<b>Material</b>	Housing: Aluminium Inside parts of steel
<b>Operating pressure</b>	max. 350 bar

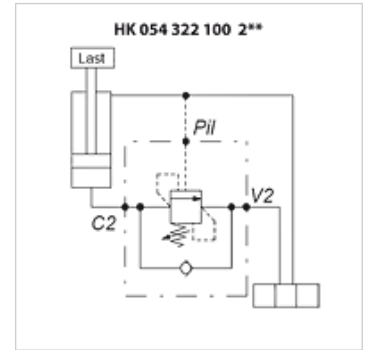

## Note

Max. load pressure 250 bar

## Item

Identification	Thread	Pressure setting range bar	Q max. (L/min)	Level control ratio	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	I (mm)	Design	Weight (kg)
HK 054 322 100 220	G 3/8"	60 - 210	40	1:3.55	160	30	60	20	40	65	12	100	-	0,75
HK 054 322 100 235	G 3/8"	120 - 350	40	1:3.55	160	30	60	20	40	65	12	100	-	0,75
HK 054 322 100 320	G 1/2"	60 - 210	70	1:3.55	185	35	80	26	41	71	18	107	with measurement connector	1,20
HK 054 322 100 335	G 1/2"	120 - 350	70	1:3.55	185	35	80	26	41	71	18	107	with measurement connector	1,29