
HK 054 322

Counterbalancing valve SC, single-acting

Properties

Design	single-acting Pilot controlled Seat version - leak-free
Material	Housing: Aluminium Inside parts of steel
Operating pressure	max. 350 bar



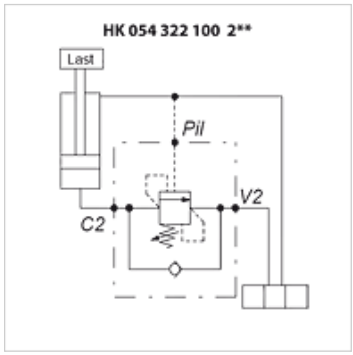

Note

Max. load pressure 250 bar

Item

Identification	Thread	Pressure setting range bar	Q max. (L/min)	Level control ratio	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	I (mm)	Design	Weight (kg)
HK 054 322 100 220	G 3/8"	60 - 210	40	1:3.55	160	30	60	20	40	65	12	100	-	0,75
HK 054 322 100 235	G 3/8"	120 - 350	40	1:3.55	160	30	60	20	40	65	12	100	-	0,75
HK 054 322 100 320	G 1/2"	60 - 210	70	1:3.55	185	35	80	26	41	71	18	107	with measurement connector	1,20
HK 054 322 100 335	G 1/2"	120 - 350	70	1:3.55	185	35	80	26	41	71	18	107	with measurement connector	1,29

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.