
HK 055 3

Check valve SC, double-acting

Properties

Design	Cone locking pilot-controlled - double-acting Seat version - leak-free
Material	Housing: Aluminium Inside parts of steel
Operating pressure	max. 350 bar



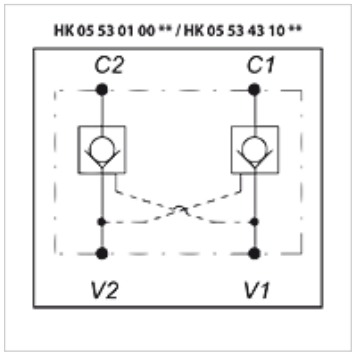

Item

Identification	Thread	Opening pressure (bar)	Level control ratio	Q max. (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	Weight (kg)
HK 055 301 000 300	G 1/2”	1,5	1:3.2	50	110	35	69	40	69	35	34	0,92
HK 055 301 000 400	G 3/4”	1,5	1:4	100	165	50	89	60	105	44	50	2,61
HK 055 343 109 700	G 3/8”	1,0	1:7	30	123	35	60	40	62	30	32	0,64

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.