


## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	metric nut thread
<b>Sealing form 1</b>	24° outer cone with O-ring
<b>Standard</b>	DIN 3865 ISO 8434-1
<b>Short code</b>	DKOS
<b>Construction</b>	straight
<b>Series</b>	heavy
<b>Material</b>	Stainless steel

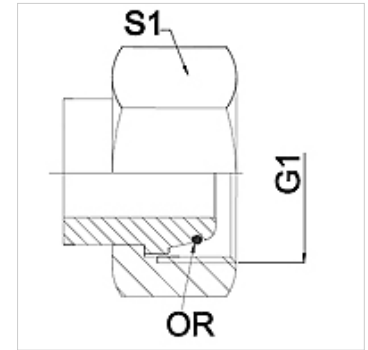

## Note

Width across flats values are listed for reference purposes!

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	G1	Series	S1 (mm)
WA 004 AOS VA	4	630	M 16 x 1.5	8S	19,0
WA 006 AOS VA	6	630	M 18 x 1.5	10 S	22,0
WA 008 AOS VA	8	630	M 20 x 1.5	12 S	24,0
WA 010 AOS VA	10	630	M 22 x 1.5	14 S	27,0
WA 013 AOS VA	13	400	M 24 x 1.5	16 S	30,0
WA 016 AOS VA	16	400	M 30 x 2	20 S	36,0
WA 020 AOS VA	20	400	M 36 x 2	25 S	46,0
WA 025 AOS VA	25	250	M 42 x 2	30 S	50,0
WA 032 AOS VA	32	250	M 52 x 2	38 S	60,0

## Product versions

WA AOS Connector ... AOS, steel, Steel (weldable)