


Properties

| | |
|-----------------------|------------------------------------|
| Application | Connection fitting for metal hoses |
| Connection 1 | metric nut thread |
| Sealing form 1 | 24° outer cone with O-ring |
| Standard | DIN 3865 ISO 8434-1 |
| Short code | DKOS |
| Construction | straight |
| Series | heavy |
| Material | Stainless steel |

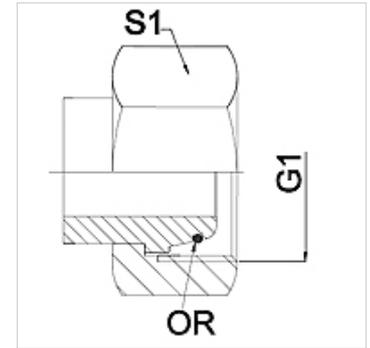

Note

Width across flats values are listed for reference purposes!

Ordering information

Other designs available on request

Item

| Identification | DN | PN (bar) | G1 | Series | S1 (mm) |
|----------------|----|----------|------------|--------|---------|
| WA 004 AOS VA | 4 | 630 | M 16 x 1.5 | 8S | 19,0 |
| WA 006 AOS VA | 6 | 630 | M 18 x 1.5 | 10 S | 22,0 |
| WA 008 AOS VA | 8 | 630 | M 20 x 1.5 | 12 S | 24,0 |
| WA 010 AOS VA | 10 | 630 | M 22 x 1.5 | 14 S | 27,0 |
| WA 013 AOS VA | 13 | 400 | M 24 x 1.5 | 16 S | 30,0 |
| WA 016 AOS VA | 16 | 400 | M 30 x 2 | 20 S | 36,0 |
| WA 020 AOS VA | 20 | 400 | M 36 x 2 | 25 S | 46,0 |
| WA 025 AOS VA | 25 | 250 | M 42 x 2 | 30 S | 50,0 |
| WA 032 AOS VA | 32 | 250 | M 52 x 2 | 38 S | 60,0 |

Product versions

WA AOS Connector ... AOS, steel, Steel (weldable)