


# HK DTDA

2/2-way solenoid-operated directional control valve DTDA

**HANSA FLEX**

## Properties

<b>Design</b>	direct-controlled with manual emergency operation
<b>Scope of supply</b>	without coil or plug
<b>Operating pressure</b>	max. 350 bar

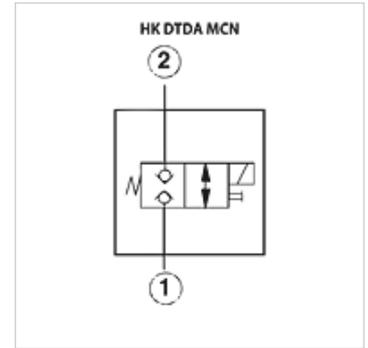

## Description

Max. leakage 0.7cm<sup>3</sup>/min at 250 bar and 32cSt

## Ordering information

Please order solenoid coil separately (see accessories)

## Item

Identification	Volumetric flow min. (L/min)	A (mm)	B (mm)	C (mm)	Screw-in housing	Screw-in thread	AF (mm)	Tightening torque (N-m)	Design	Weight (kg)
HK DTDA MCN	40,0	89,0	35,0	37,0	HK GAU / HK GAUS / HK GAV	T-13A	22	48,0	power-off closed, double locking	0,5
HK DTDA MHN	40,0	89,0	35,0	37,0	HK GAU / HK GAUS / HK GAV	T-13A	22	48,0	power-off open, double locking	0,5

## Accessories

<b>HK SP 770</b>	Coil for cartridge valve SUN
<b>HK GEH GA</b>	Valve housing for cartridge valve T-13A
<b>HK GEH GBA</b>	Housing sandwich plate with measurement connctn. for cart. valve T-13A
<b>HK GEH GBY</b>	Housing sandwich plate with measurement connctn. for cart. valve T-13A
<b>HK GEH MBJ</b>	Housing sandwich plate for cartridge valve T-31A