


HK DTDA

2/2-way solenoid-operated directional control valve DTDA

HANSA FLEX

Properties

Design	direct-controlled with manual emergency operation
Scope of supply	without coil or plug
Operating pressure	max. 350 bar

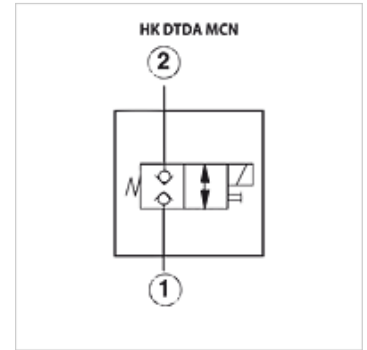

Description

Max. leakage 0.7cm³/min at 250 bar and 32cSt

Ordering information

Please order solenoid coil separately (see accessories)

Item

Identification	Volumetric flow min. (L/min)	A (mm)	B (mm)	C (mm)	Screw-in housing	Screw-in thread	AF (mm)	Tightening torque (N-m)	Design	Weight (kg)
HK DTDA MCN	40,0	89,0	35,0	37,0	HK GAU / HK GAUS / HK GAV	T-13A	22	48,0	power-off closed, double locking	0,5
HK DTDA MHN	40,0	89,0	35,0	37,0	HK GAU / HK GAUS / HK GAV	T-13A	22	48,0	power-off open, double locking	0,5

Accessories

HK SP 770	Coil for cartridge valve SUN
HK GEH GA	Valve housing for cartridge valve T-13A
HK GEH GBA	Housing sandwich plate with measurement connctn. for cart. valve T-13A
HK GEH GBY	Housing sandwich plate with measurement connctn. for cart. valve T-13A
HK GEH MBJ	Housing sandwich plate for cartridge valve T-31A