
HK FD

2-way directional control valve FD

Properties

Design	with non-return valve for free return (pre-loading 0.7bar) pressure relieved valve spindle for easy adjustment
Operating pressure	max. 350 bar



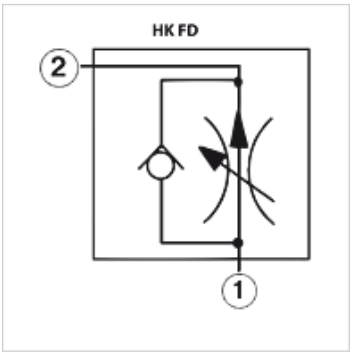

Item

Identification	Volumetric flow min. (L/min)	Volumetric flow max. (L/min)	A (mm)	B (mm)	Screw-in housing	Screw-in thread	AF (mm)	Tightening torque (N-m)	Weight (kg)
HK FD BA LCN	0,4	4,0	52,0	35,0	HK GAU / HK GAUS / HK GAV / HK GBA / HK GBY	T-13A	22	50,0	0,5
HK FD BA LBN	0,4	8,0	52,0	35,0	HK GAU / HK GAUS / HK GAV / HK GBA / HK GBY	T-13A	22	50,0	0,5
HK FD BA LAN	0,4	23,0	52,0	35,0	HK GAU / HK GAUS / HK GAV / HK GBA / HK GBY	T-13A	22	50,0	0,5
HK FD CB LBN	1,0	11,5	62,0	41,0	HK DAV / HK DAVS	T-5A	28	65,0	0,5
HK FD CB LWN	1,0	30,0	62,0	41,0	HK DAV / HK DAVS	T-5A	28	65,0	0,5
HK FD CB LAN	1,0	45,0	62,0	41,0	HK DAV / HK DAVS	T-5A	28	65,0	0,5

Accessories

HK GEH DA	Valve housing for cartridge valve T-5A
HK GEH GA	Valve housing for cartridge valve T-13A
HK GEH GBA	Housing sandwich plate with measurement connctn. for cart. valve T-13A
HK GEH GBY	Housing sandwich plate with measurement connctn. for cart. valve T-13A
HK HR SUN	Hand wheel for cartridge valve SUN

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.