


# WA HB

Connector ... HB, steel

**HANSA FLEX**

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	60° inner cone
<b>Standard</b>	ISO 228-1 ISO 8434-6 BS 5200
<b>Short code</b>	AGR
<b>Construction</b>	straight
<b>Material</b>	Steel

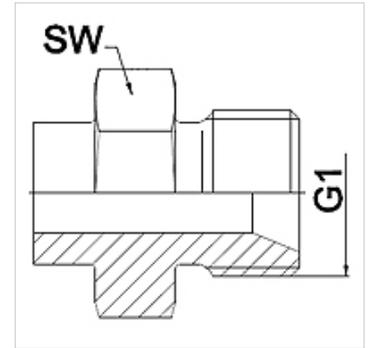

## Note

Welded variant in stainless steel only  
Width across flats values are listed for reference purposes!

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	G1	AF (mm)
WA 006 HB	6	350	G 1/4"	19
WA 010 HB	10	350	G 3/8"	22
WA 013 HB	13	315	G 1/2"	27
WA 016 HB	16	315	G 5/8"	30
WA 020 HB	20	250	G 3/4"	32
WA 025 HB	25	200	G 1"	41
WA 032 HB	32	160	G 1.1/4"	50
WA 040 HB	40	125	G 1.1/2"	55
WA 050 HB	50	80	G 2"	70

## Product versions

WA HB VA Connector ... HB, VA, Stainless steel