
WA HL

Connector ... HL, steel

Properties

Application	Connection fitting for metal hoses
Connection 1	metric cylindrical outer thread
Sealing form 1	24° inner cone
Standard	DIN 2353 ISO 8434-1
Short code	CEL
Construction	straight
Series	light
Material	Steel (weldable)



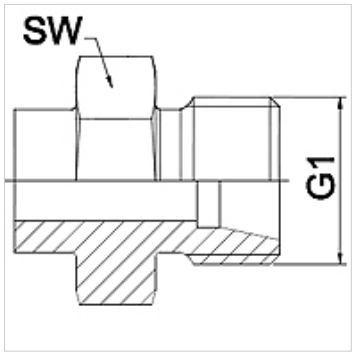

Note

Width across flats values are listed for reference purposes!

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	G1	Series	AF (mm)
WA 004 HL	4	250	M 12 x 1.5	6 L	14
WA 006 HL	6	250	M 14 x 1.5	8 L	17
WA 008 HL	8	250	M 16 x 1.5	10 L	17
WA 010 HL	10	250	M 18 x 1.5	12 L	19
WA 013 HL	13	250	M 22 x 1.5	15 L	22
WA 016 HL	16	160	M 26 x 1.5	18 L	27
WA 020 HL	20	160	M 30 x 2	22 L	32
WA 025 HL	25	100	M 36 x 2	28 L	41
WA 032 HL	32	100	M 45 x 2	35 L	46
WA 040 HL	40	100	M 52 x 2	42 L	55

Product versions

WA HL VA	Connector ... HL, VA, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.