


# WA HS

Connector ... HS, steel

**HANSA FLEX**

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	metric cylindrical outer thread
<b>Sealing form 1</b>	24° inner cone
<b>Standard</b>	DIN 2353 ISO 8434-1
<b>Short code</b>	CES
<b>Construction</b>	straight
<b>Series</b>	heavy
<b>Material</b>	Steel (weldable)

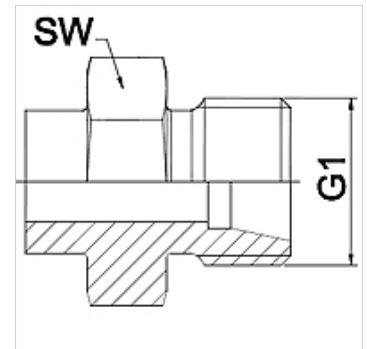

## Note

Width across flats values are listed for reference purposes!

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	G1	Series	AF (mm)
WA 004 HS	4	630	M 16 x 1.5	8S	17
WA 006 HS	6	630	M 18 x 1.5	10 S	19
WA 008 HS	8	630	M 20 x 1.5	12 S	22
WA 010 HS	10	630	M 22 x 1.5	14 S	24
WA 013 HS	13	400	M 24 x 1.5	16 S	27
WA 016 HS	16	400	M 30 x 2	20 S	32
WA 020 HS	20	400	M 36 x 2	25 S	36
WA 025 HS	25	250	M 42 x 2	30 S	46
WA 032 HS	32	250	M 52 x 2	38 S	55

## Product versions

WA HS VA Connector ... HS, VA, Stainless steel