


Properties

Application	Connection fitting for metal hoses
Connection 1	metric cylindrical outer thread
Sealing form 1	24° inner cone
Standard	DIN 2353 ISO 8434-1
Short code	CES
Construction	straight
Series	heavy
Material	Stainless steel

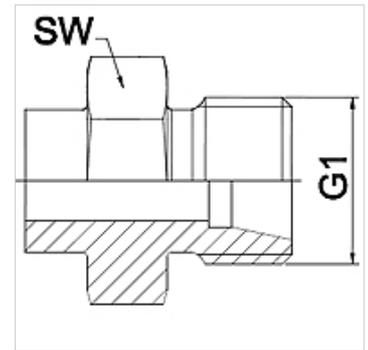

Note

Width across flats values are listed for reference purposes!

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	G1	Series	AF (mm)
WA 004 HS VA	4	630	M 16 x 1.5	8S	17
WA 006 HS VA	6	630	M 18 x 1.5	10 S	19
WA 008 HS VA	8	630	M 20 x 1.5	12 S	22
WA 010 HS VA	10	630	M 22 x 1.5	14 S	24
WA 013 HS VA	13	400	M 24 x 1.5	16 S	27
WA 016 HS VA	16	400	M 30 x 2	20 S	32
WA 020 HS VA	20	400	M 36 x 2	25 S	36
WA 025 HS VA	25	250	M 42 x 2	30 S	46
WA 032 HS VA	32	250	M 52 x 2	38 S	55

Product versions

WA HS	Connector ... HS, steel, Steel (weldable)
--------------	---