


### Properties

|                           |   |
|---------------------------|---|
| <b>Operating pressure</b> | to 420 bar (6000PSI)                                      |
| <b>Colour</b>             | yellow + black  |
| <b>Temp. min.</b>         | -35 °C  |
| <b>Temp. max.</b>         | 110 °C  |
| <b>Media</b>              | Mineral oils  |
| <b>Installation</b>       | on SAE flange 3000 and 6000 PSI                           |
| <b>Material</b>           | 1) Polyurethane 57 Shore A<br>(2) Polyurethane 95 Shore A |

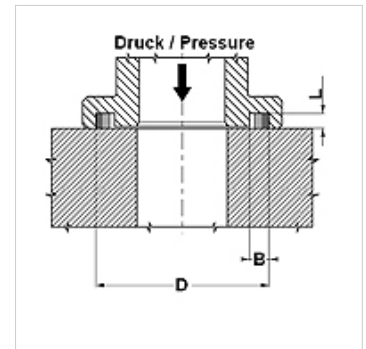

### Description

Good extrusion resistance.  
 Long service life.  
 Easy assembly because the seal and flange adhere to each other.

### Item

| Identification | Flange size | D<br>(mm) | e<br>(mm) | B<br>(mm) |
|----------------|-------------|-----------|-----------|-----------|
| SFS - 08       | 1/2"        | 25,4      | 2,85      | 4,2       |
| SFS - 12       | 3/4"        | 31,8      | 2,85      | 4,2       |
| SFS - 16       | 1"          | 39,7      | 2,85      | 4,2       |
| SFS - 20       | 1.1/4"      | 44,5      | 2,85      | 4,2       |
| SFS - 24       | 1.1/2"      | 53,8      | 2,85      | 4,2       |
| SFS - 32       | 2"          | 63,4      | 2,85      | 4,2       |
| SFS - 40       | 2.1/2"      | 76,2      | 2,85      | 4,2       |
| SFS - 48       | 3"          | 91,9      | 2,85      | 4,2       |