



**Properties**

Design	rod seal
Operating pressure	up to 250 bar
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	150 °C
Media	Mineral oils Water emulsions
Installation	in closed grooves in open grooves
Material	FPM-K
Application	Hydraulics



Spaltmaß / Clearance	
Druck / Pressure (bar)	e (mm)
160	< 0,2
250	< 0,1

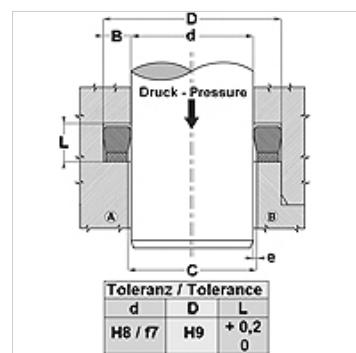

**Description**

Low-friction seal.

Extremely good sealing effect at low pressure.

Simple solution.

**Item**

Identification	D (mm)	d (mm)	L (mm)
<b>B 137 098 FPM-K</b>	35,0	35,00	9,0
<b>B 196 137 FPM-K</b>	50,0	35,00	11,5
<b>B 330 275 FPM-K</b>	84,0	70,00	12,5
<b>B 492 413 FPM-K</b>	125,0	105,00	12,5