


# B FPM-K


## Rod seal B-FPM/K

### Properties

<b>Design</b>	rod seal
<b>Operating pressure</b>	up to 250 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	150 °C
<b>Media</b>	Mineral oils Water emulsions
<b>Installation</b>	in closed grooves in open grooves
<b>Material</b>	FPM-K
<b>Application</b>	Hydraulics



Spaltmaß / Clearance	
Druck / Pressure (bar)	e (mm)
160	< 0,2
250	< 0,1

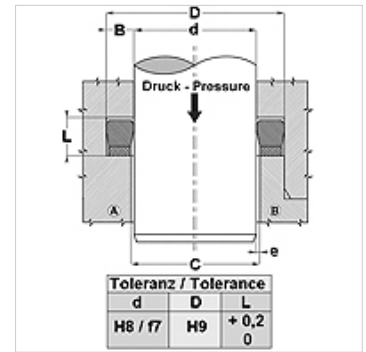

### Description

Low-friction seal.  
Extremely good sealing effect at low pressure.  
Simple solution.

### Item

Identification	D (mm)	d (mm)	L (mm)
<b>B 137 098 FPM-K</b>	35,0	35,00	9,0
<b>B 196 137 FPM-K</b>	50,0	35,00	11,5
<b>B 330 275 FPM-K</b>	84,0	70,00	12,5
<b>B 492 413 FPM-K</b>	125,0	105,00	12,5