

B FPM-K
Rod seal B-FPM/K

Properties

Design	rod seal
Operating pressure	up to 250 bar
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	150 °C
Media	Mineral oils Water emulsions
Installation	in closed grooves in open grooves
Material	FPM-K
Application	Hydraulics



Spaltmaß / Clearance	
Druck / Pressure (bar)	e (mm)
160	< 0,2
250	< 0,1

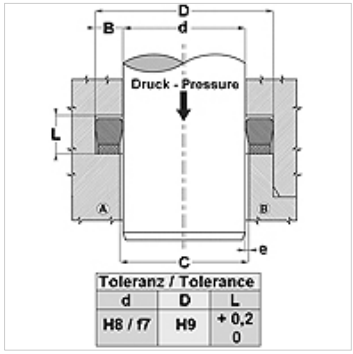

Toleranz / Tolerance		
d	D	L
H8 / f7	H9	+ 0,2 0

Description

Low-friction seal.
Extremely good sealing effect at low pressure.
Simple solution.

Item

Identification	D (mm)	d (mm)	L (mm)
B 137 098 FPM-K	35,0	35,00	9,0
B 196 137 FPM-K	50,0	35,00	11,5
B 330 275 FPM-K	84,0	70,00	12,5
B 492 413 FPM-K	125,0	105,00	12,5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.