
DBM NEO


Piston packing set for one-piece pistons DBM-NEO

Properties

Operating pressure	up to 300 bar
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	110 °C
Media	Mineral oils Water emulsions
Installation	on one-piece or multi-part pistons
Material	(1) Seal: NBR (3) Support ring: Polyester (4) Back ring: acetal resin
Application	Hydraulics



Toleranz / Tolerance					
D	d	L	G	M	P
H11	+0,12 0	+0,20 0	+0,10 0	± 0,05	± 0,15

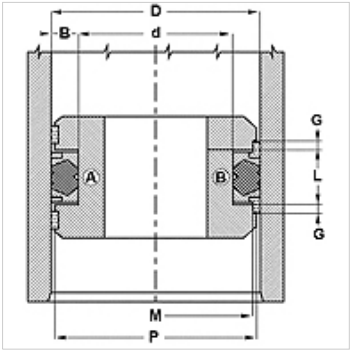

Description

Extremely good sealing effect at low pressure.
Easy assembly.
Simple solution.

Ordering information

Alternative material possible

Item

Identification	D (mm)	d (mm)	L (mm)
DBM 157 118-NEO	40	30	16,4
DBM 236 173-NEO	60	44	18,4
DBM 314 236-NEO	80	60	22,4

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.