


# DBM NEO


Piston packing set for one-piece pistons DBM-NEO

## Properties

<b>Operating pressure</b>	up to 300 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	110 °C
<b>Media</b>	Mineral oils Water emulsions
<b>Installation</b>	on one-piece or multi-part pistons
<b>Material</b>	(1) Seal: NBR (3) Support ring: Polyester (4) Back ring: acetal resin
<b>Application</b>	Hydraulics



Toleranz / Tolerance					
D	d	L	G	M	P
H11	+0,12 0	+0,20 0	+0,10 0	± 0,05	± 0,15

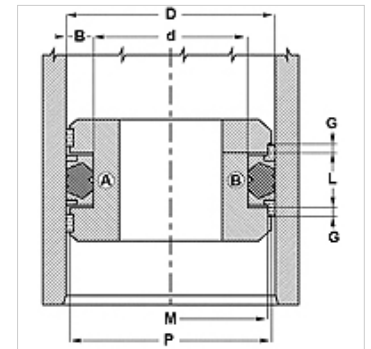

## Description

Extremely good sealing effect at low pressure.  
Easy assembly.  
Simple solution.

## Ordering information

Alternative material possible

## Item

Identification	D (mm)	d (mm)	L (mm)
DBM 157 118-NEO	40	30	16,4
DBM 236 173-NEO	60	44	18,4
DBM 314 236-NEO	80	60	22,4