



Properties

Design	Rod lip seal
Operating pressure	up to 16 bar
Sliding speed max.	1,0 m/s
Temp. min.	-30 °C
Temp. max.	80 °C
Media	Air
Installation	in closed grooves A in open grooves B
Material	PUR 90° Shore A
Application	Hydraulics + pneumatics



Toleranz / Tolerance		
d	D	L
H8 / f7	H9	+0,5 0

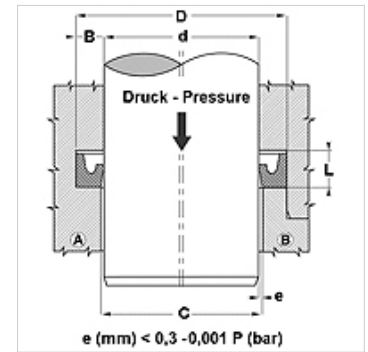

Description

Low-friction seal.
Simple solution.

Ordering information

Other sizes on request

Item

Identification	D (mm)	d (mm)	L (mm)	H (mm)
DDIM 05 09-P	9	5	3,0	2,5
DDIM 06 12-P	12	6	4,5	4,0
DDIM 08 14-P	14	8	4,5	4,0
DDIM 10 16-P	16	10	5,0	4,5
DDIM 30 38-P	38	30	6,0	5,5
DDIM 50 60-P	60	50	7,5	7,0

Product versions

DDIM Rod seal DDIM, NBR 90° Shore A